



Logger Patch "Passive"



Description:

The Total Recall Logger Patch enables recording from digital PABX handsets. The logger patch is simply inserted between the handset cord and the PABX telephone using the 250mm cable provided.


2 Looped RJ11 inputs (4P-4C) are provided to allow remote mounting of the logger patch.

Often phone handsets have different microphone and speaker outputs. Using the Handset Line select (JP1), you can jumper the appropriate setting. Default setting is selected as "Both".

Jumper Configurations:

Jumper Configurations

Handset Line Select: JP1		
Outer	Inner	Both

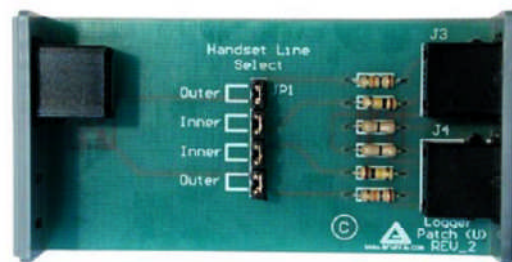

Output connector J1 (RJ-12) to Total Recall.

The output RJ12 (6P-6C) connector is configured as follows:
Pins 1,2 & 3 connected together, Pins 4,5 & 6 connected together

Specifications:

Frequency response:	200Hz - 5kHz
Source Impedance:	7.5k: (typical depending on PABX handset circuit)
Signal-to-Noise Ratio	50dB (typical depending on cable length)
Weight:	45 grams
Size:	83 mm - 3.1/4" (wide) 45 mm - 1.3/4" (high) 28 mm - 1.1/4" (deep)
Product Order Code	TR-Log Patch(U)

Elcor Pte Ltd – (Total Recall Singapore)

Business Registration No: 200608510R
10 Anson Rd, #21-02 International Plaza

Tel: +65 9179 3584 Email: sales@totalrecall.com.sg Web: www.totalrecall.com.sg